

FURUNO®

Terminal Box
DS-802

TTYCY-28°
Max 150 m

Option

* To be arranged

DOPPLER SPEED LOG

Doppler Speed Log

DS-80



The future today with FURUNO's electronics technology.

FURUNO ELECTRIC CO., LTD.

9-52 Ashihara-cho, Nishinomiya City, Japan Phone: +81 (0)798 65-2111
Fax: +81 (0)798 65-4200, 66-4622 URL: www.furuno.co.jp

Catalogue No. M-1520f

TRADE MARK REGISTERED
MARCA REGISTRADA

- Speed and distance run indicated on a large illuminated LCD display
- Compact display unit and transducer
- High accuracy by utilizing the Doppler principle, paired beam eliminating effect of pitching, and velocity correction for change of water temperature
- Easy speed correction at mile post run

- Speed output to ARPA, radar, ECDIS, AIS, VDR, GMDSS equipment, etc.
- Complies with IMO standards MSC.96 (76), A.824 (19), A.694 (17), IEC 61023 and other related standards
- Fully meets SOLAS carriage requirement for ships over 300GT
- Fits to the hull either directly or with a gate valve

SPECIFICATIONS

- | | |
|---------------------|--|
| 1. Measuring System | Paired-beam Doppler log, 1 MHz |
| 2. Display unit | 4.5" (95 x 60 mm) Monochrome LCD
120 x 64 pixels
Character size:
15 or 21 mm high selectable |
| 3. Speed Range | Forward: 0 - 40 kt, 0.1 kt steps
Astern: 0 - 10 kt, 0.1 kt steps |
| 4. Distance Run | 0-999,999.99 nm,
resettable to any value. |
| 5. Accuracy | Speed through-the-water (STW):
1%, display resolution 0.1 kt
Distance run: 1%, in steps of 0.1 nm
Deeper than 3 m |
| 6. Water Depth | |
| 7. Correction | Automatic correction for change of
water temperature |
| Sound velocity: | |
| Mile post run: | ±10% on menu |
| 8. Test | -10 and 40 kt |
| 9. Power Supply | 115/230 VAC |
| 10. Interface | IEC 61162-1 |
| Output: | VBW, VLW |

ENVIRONMENT (IEC 60945 test method)

- | | |
|---------------|----------------------------------|
| Temperature | -15°C to +55°C (Display unit) |
| Waterproofing | Display unit; IPX5 CFR-46 (USCG) |

EQUIPMENT LIST

Standard


- | | |
|--|--------|
| 1. Main Display DS-800 | 1 unit |
| 2. Transducer Unit DS-820
with 10/20/30 m cable | 1 unit |
| 3. Transceiver Unit DS-810 | 1 unit |
| 4. Distribution Box DS-801 | 1 unit |
| 5. Terminal Box DS-802 | 1 unit |

Option

- | | |
|-------------------------------------|--------|
| 1. Digital Indicator DS-830 | 1 unit |
| 2. Remote Distance Indicator DS-840 | 1 unit |
| 3. Transducer Tank DS-850 | 1 unit |
| 4. Flush Mount Kit F type or S type | 1 unit |
| 5. Gate Valve DS-782, DS-786 | 1 unit |
| 6. Junction Box CI-630 | 1 unit |
| 7. Analog Display | 1 unit |


TRANSCIVER UNIT

DS-810
8.0 kg, 17.6 lb




DISTRIBUTION BOX

DS-801
14 kg, 30.9 lb




INTERCONNECTION DIAGRAM

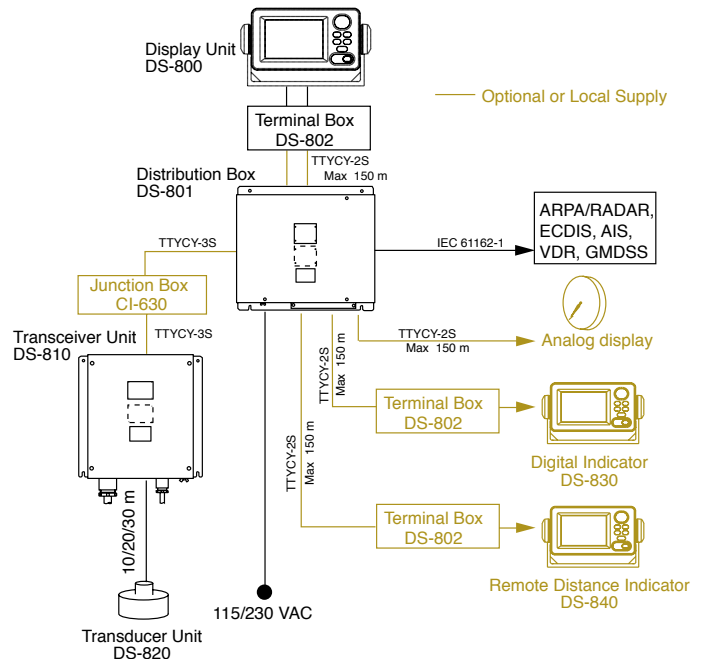


DISPLAY UNIT DS-800

0.6 kg, 1.3 lb

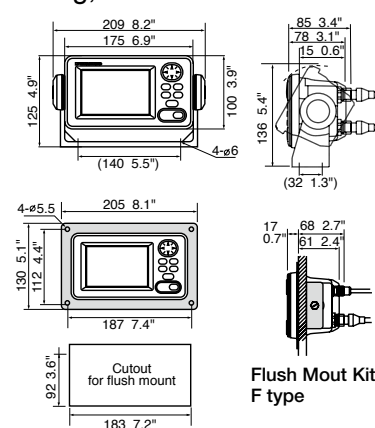


GATE VALVE

DS-782
75 kg, 165.3 lb



DS-786
40 kg, 88.1 lb



SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO U.S.A., INC.

Camas, Washington, U.S.A.
Phone: +1 360-834-9300
Fax: +1 360-834-9400

FURUNO (UK) LIMITED

Havant, Hampshire, U.K.
Phone: +44 2392-441000
Fax: +44 2392-484316

FURUNO FRANCE S.A.

Bordeaux-Mérignac, France
Phone: +33 5 56 13 48 00
Fax: +33 5 56 13 48 01

FURUNO ESPAÑA S.A.

Madrid, Spain
Phone: +34 91-725-90-88
Fax: +34 91-725-98-97

FURUNO DANMARK AS

Hvidovre, Denmark
Phone: +45 36 77 45 00
Fax: +45 36 77 45 01

FURUNO NORGE A/S

Ålesund, Norway
Phone: +47 70 102950
Fax: +47 70 102951

FURUNO SVERIGE AB

Västra Frölunda, Sweden
Phone: +46 31-7098940
Fax: +46 31-497093

FURUNO FINLAND OY

Espoo, Finland
Phone: +358 9 4355 670
Fax: +358 9 4355 6710

FURUNO POLSKA Sp. z o.o.

Gdynia, Poland
Phone: +48 58 669 02 20
Fax: +48 58 669 02 21

FURUNO DEUTSCHLAND

Rellingen, Germany
Phone: +49 4101 838 0
Fax: +49 4101 838 111

LLC "FURUNO EURUS"

St. Petersburg, Russian Federation
Phone: +7 812 767 15 92
Fax: +7 812 766 55 52



07023SS

Printed in Japan



浩通科技

HaoTong Technology

www.webhaotong.com